


FLOOR TREATMENT



Absorbant-floor pore sealer

Pictograms of use:

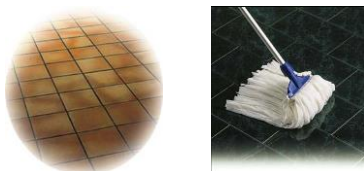

Packaging:

TSPR026: 4 l. Container – 4 units

Signage Pictograms:

GENERAL HEALTH REGISTER FOR FOODS: **37-00000271/M**

Company certified by BVQI:
Nº ESPMDD006325/ISO 14001
ENVIRONMENTAL MANAGEMENT

ISO 14001
BUREAU VERITAS
Certification



Description:

Product formulated on the basis of acrylic polymers in emulsion, to seal very porous floors, like cement, linoleum, clay, etc., for hard as well as for soft floors.

Key Properties:

Product, specially conceived for the sealing of porous floors, providing a high protection.

Use Instructions:

Remove first all type of dirt and dust.

Once clean and dry, apply the product directly and extend manually with a mop or waxing tool.

Apply at least two layers, at intervals of 30 minutes.

For extremely porous floors, it is recommended to apply a SEALANT layer first, diluted with water, at 1:1 proportion, and then apply as many layers of pure product as needed, at intervals of 30 minutes.

The maintenance can be done with all kind of neutral detergents, manually or with automatic scrubbers.

Technical Data:

* PROPERTIES:

High hardness and abrasion resistance acrylic sealant. Quick hardness development. Good adherence. Good brightness.

* SPECIFICATIONS:

Appearance: Light liquid

Colour: white

Odour: Characteristic

Density (20°): 1.020 +/- 0.005 gC/CC

PH (20°): 8.0 +/- 0.5 Gc/cc

Dry Residue: 21 +/- 0.5%

* COMPOSITION: Acrylic polymer, Plasticizer and coalescings.

Preservation and Storage:

Keep in its original package tightly closed, protecting it from cold and intense heat. Avoid freezing. Do not expose to direct sunlight.

Security and Handling:

Safety data sheet available on request. FOR PROFESSIONAL USE.

Warnings:

Do not apply the product at temperatures below 10 °C. In case of accidental ingestion, please contact the National Toxicology Service.

Our TECHNICAL DEPARTMENT will attend any doubts or questions you have about products or applications without obligation.
Tel. (+34) 91 6910263



NOTE: The warranty of Thomil applies only to the quality of the product, and does not assume liability for improper use of it.

Ctra. Andalucía, km. 18, 28320 Pinto (Madrid) www.thomil.com; profesional@thomil.com